





TECHNICAL DRAWINGS

This portfolio showcases a selection of technical drawings created specifically for events and exhibitions, demonstrating expertise in using AutoCAD and Vectorworks software.


The examples demonstrate a commitment to delivering detailed, accurate drawings tailored to the events and exhibitions industry and the synchrony between Vectorworks and Twinmotion to produce 3D visuals and animations.

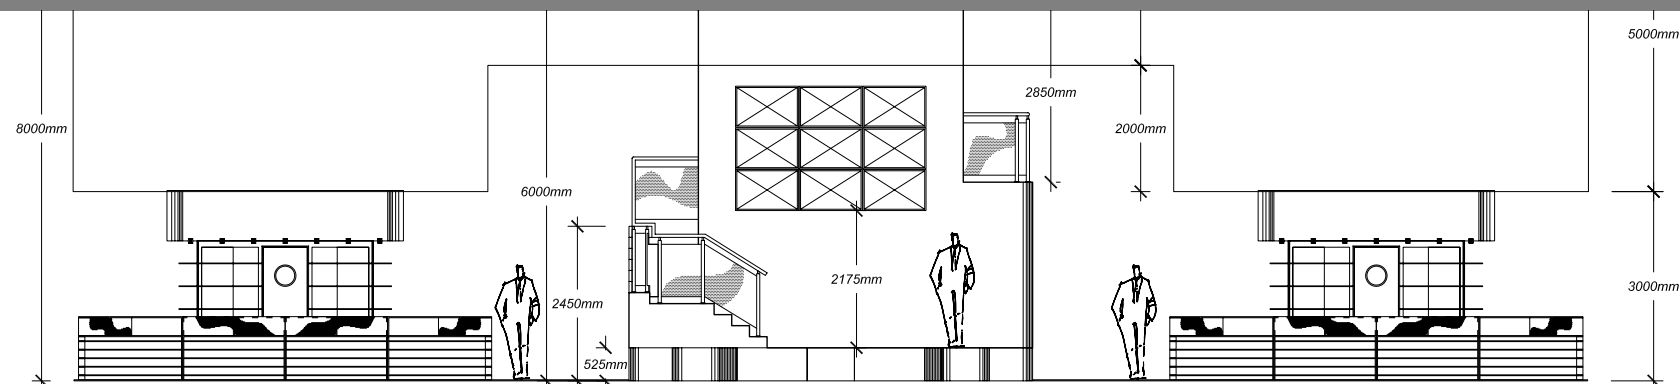


FRONT ELEVATION DRAWN @ 1.75 SCALE

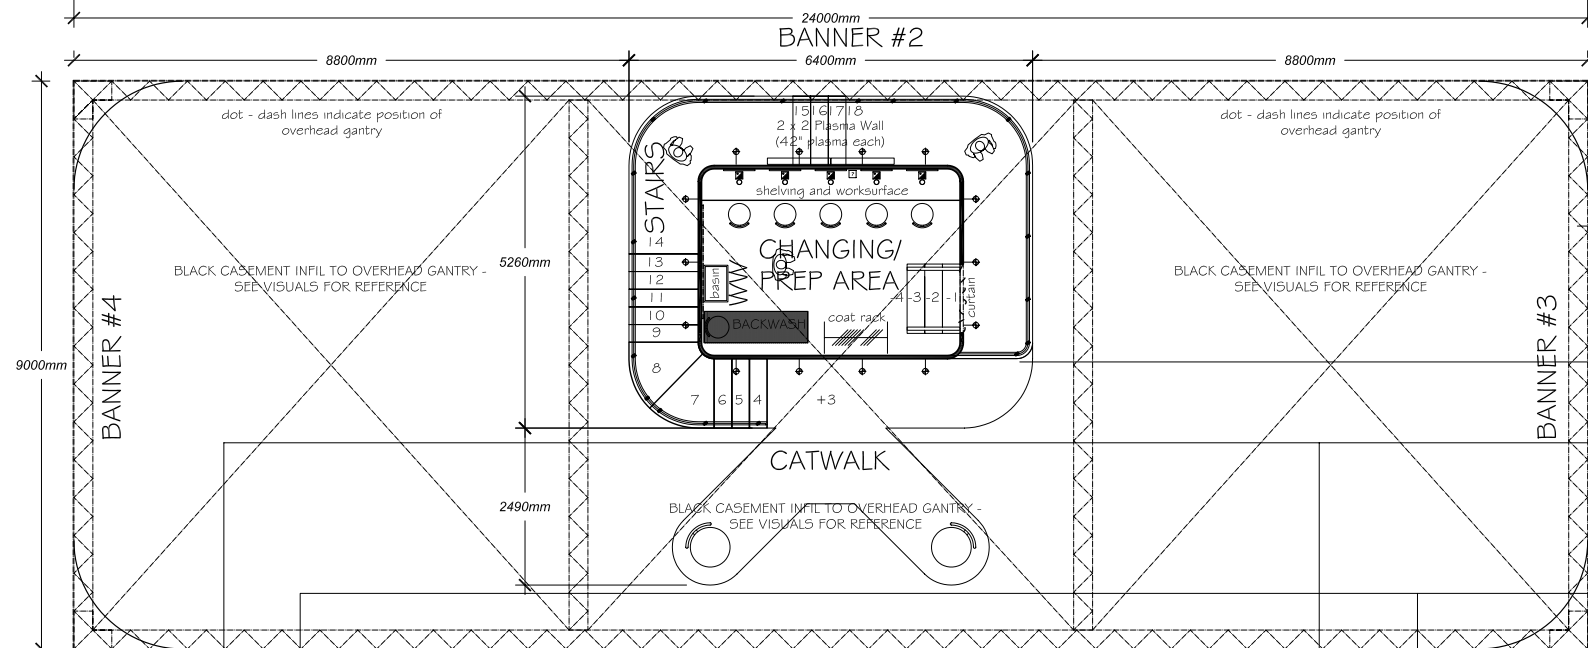

PLAN UPPER DECK DRAWN @ 1.75 SCALE

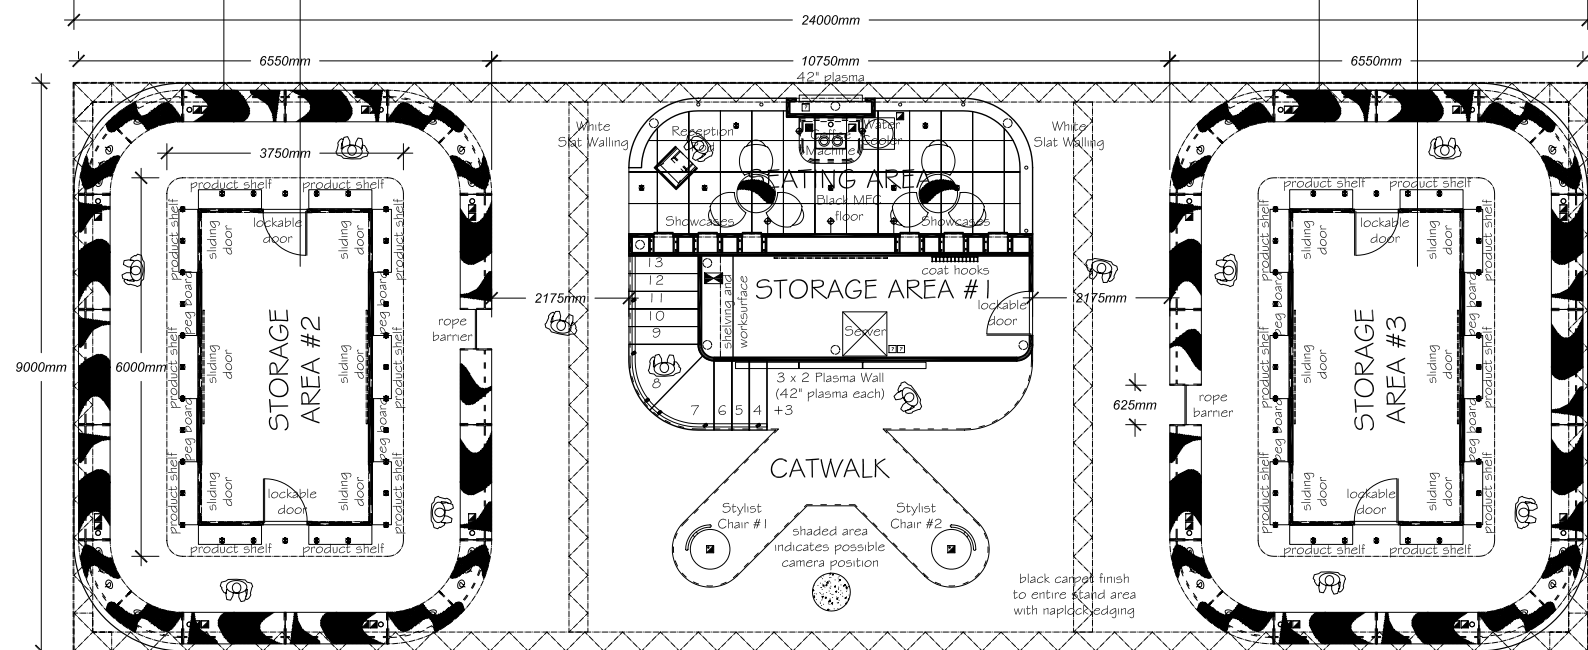

PLAN LOWER DECK DRAWN @ 1.75 SCALE




Contractor to suspend gantry over stand at position shown -
Allow for fixing 1 No continuous graphic banner to front face of gantry as indicated to wrap around all sides
- see visuals and graphic elevations for reference
Contractor to fix black casement infill to gantry where indicated on plan

Contractor to construct from timber and steel shaped double deck central structure to dimensions shown - see detail


Contractor to construct shaped product counters to various sizes and dimensions positioned where indicated on plan - see detail sheet

Contractor to construct from timber 2No. Shaped storage areas with integrated product displays - see detail

FRONT ELEVATION OF OVERHEAD GANTRY DRAWN @ 1.75 SCALE

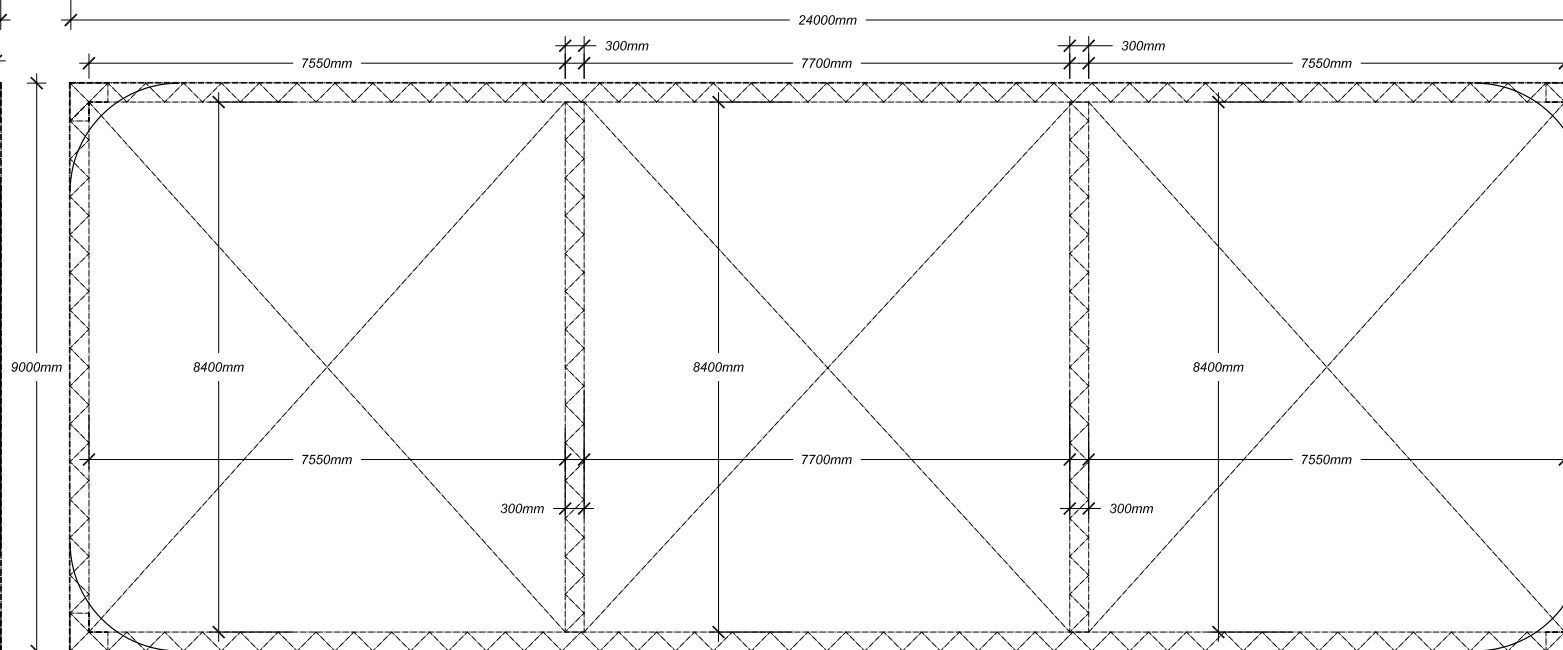

PLAN OF OVERHEAD GANTRY DRAWN @ 1.75 SCALE

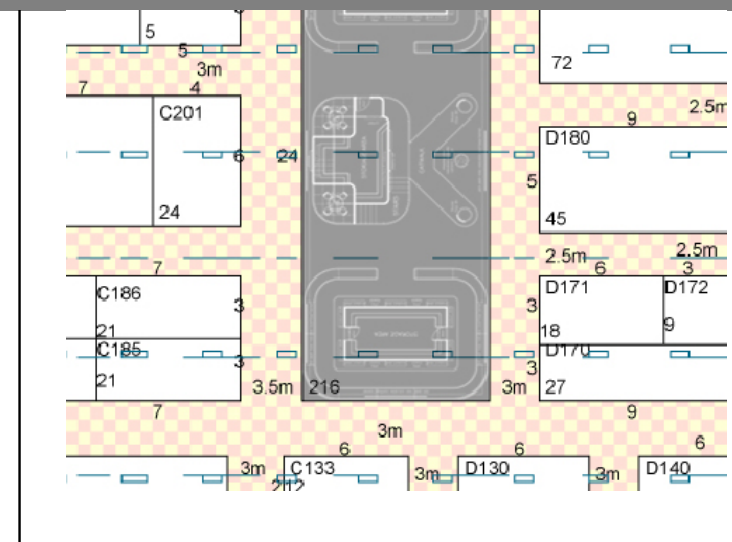

SITE PLAN - NOT TO SCALE
confirm orientation of stand with client
commencing construction



Contractor to allow for 6No. Apertures to positions indicated underneath each plasma for Set Top Boxes - Allow for 3mm thick shaped blue foamex 'eye' overlay to surround each piece of equipment - see graphic elevations for heights and dimensions of equipment and overlay.



- o ALL MEASUREMENTS IN MM'S
- o Contractor to clean and hoover entire stand to high standard prior to show opening
- o Contractor to supply bin and bin liners to store
- o Contractor to supply spare set of lamps for each type of

NOTES ... cont

- o From timber construct 6No. Lockable doors to positions shown on lower deck - laminate finish using Jennings RS 3788 T Bermuda Blue - Allow for chrome glazed porthole and chrome door handle - flush fit door to wall - Contractor to ensure doors have magnetic door stops and push key entry

NOTES ... cont




- From 500mmD white melamine construct work surfaces and shelves to layout shown in store (brochures) 1000mmH from platform to underside - Construct shelves 300mmD positioned 1500mmH and 1800mmH where indicated - contractor to ensure work surface and shelves are exceptionally strong

FINISHES

- GREEN: FANTASIA PRATO 43
- RED: FANTASIA FUOCO 19
- BLUE: FANTASIA ELECTRIC 62
- TIMBER INLAY LIGHT: 9150-C BEECH
- TIMBER INLAY DARK: 91513 CHERRY



Fix suspended white ceiling tiles to underside of Upper deck as indicated 2400mmH from platform to underside held in position using white frames - allow for recessed downlights at positions indicated on electrical plan - conceal all cables and fittings

Construct 100mmH timber platform - carpet overall stand,
Ref. Fantasia Prato 43 Green
Carpet Inlay Fantasia Electric 62 Blue
Fantasia Fuoco 19 Red
Timber Vinyl inlay 9150 - C Beech

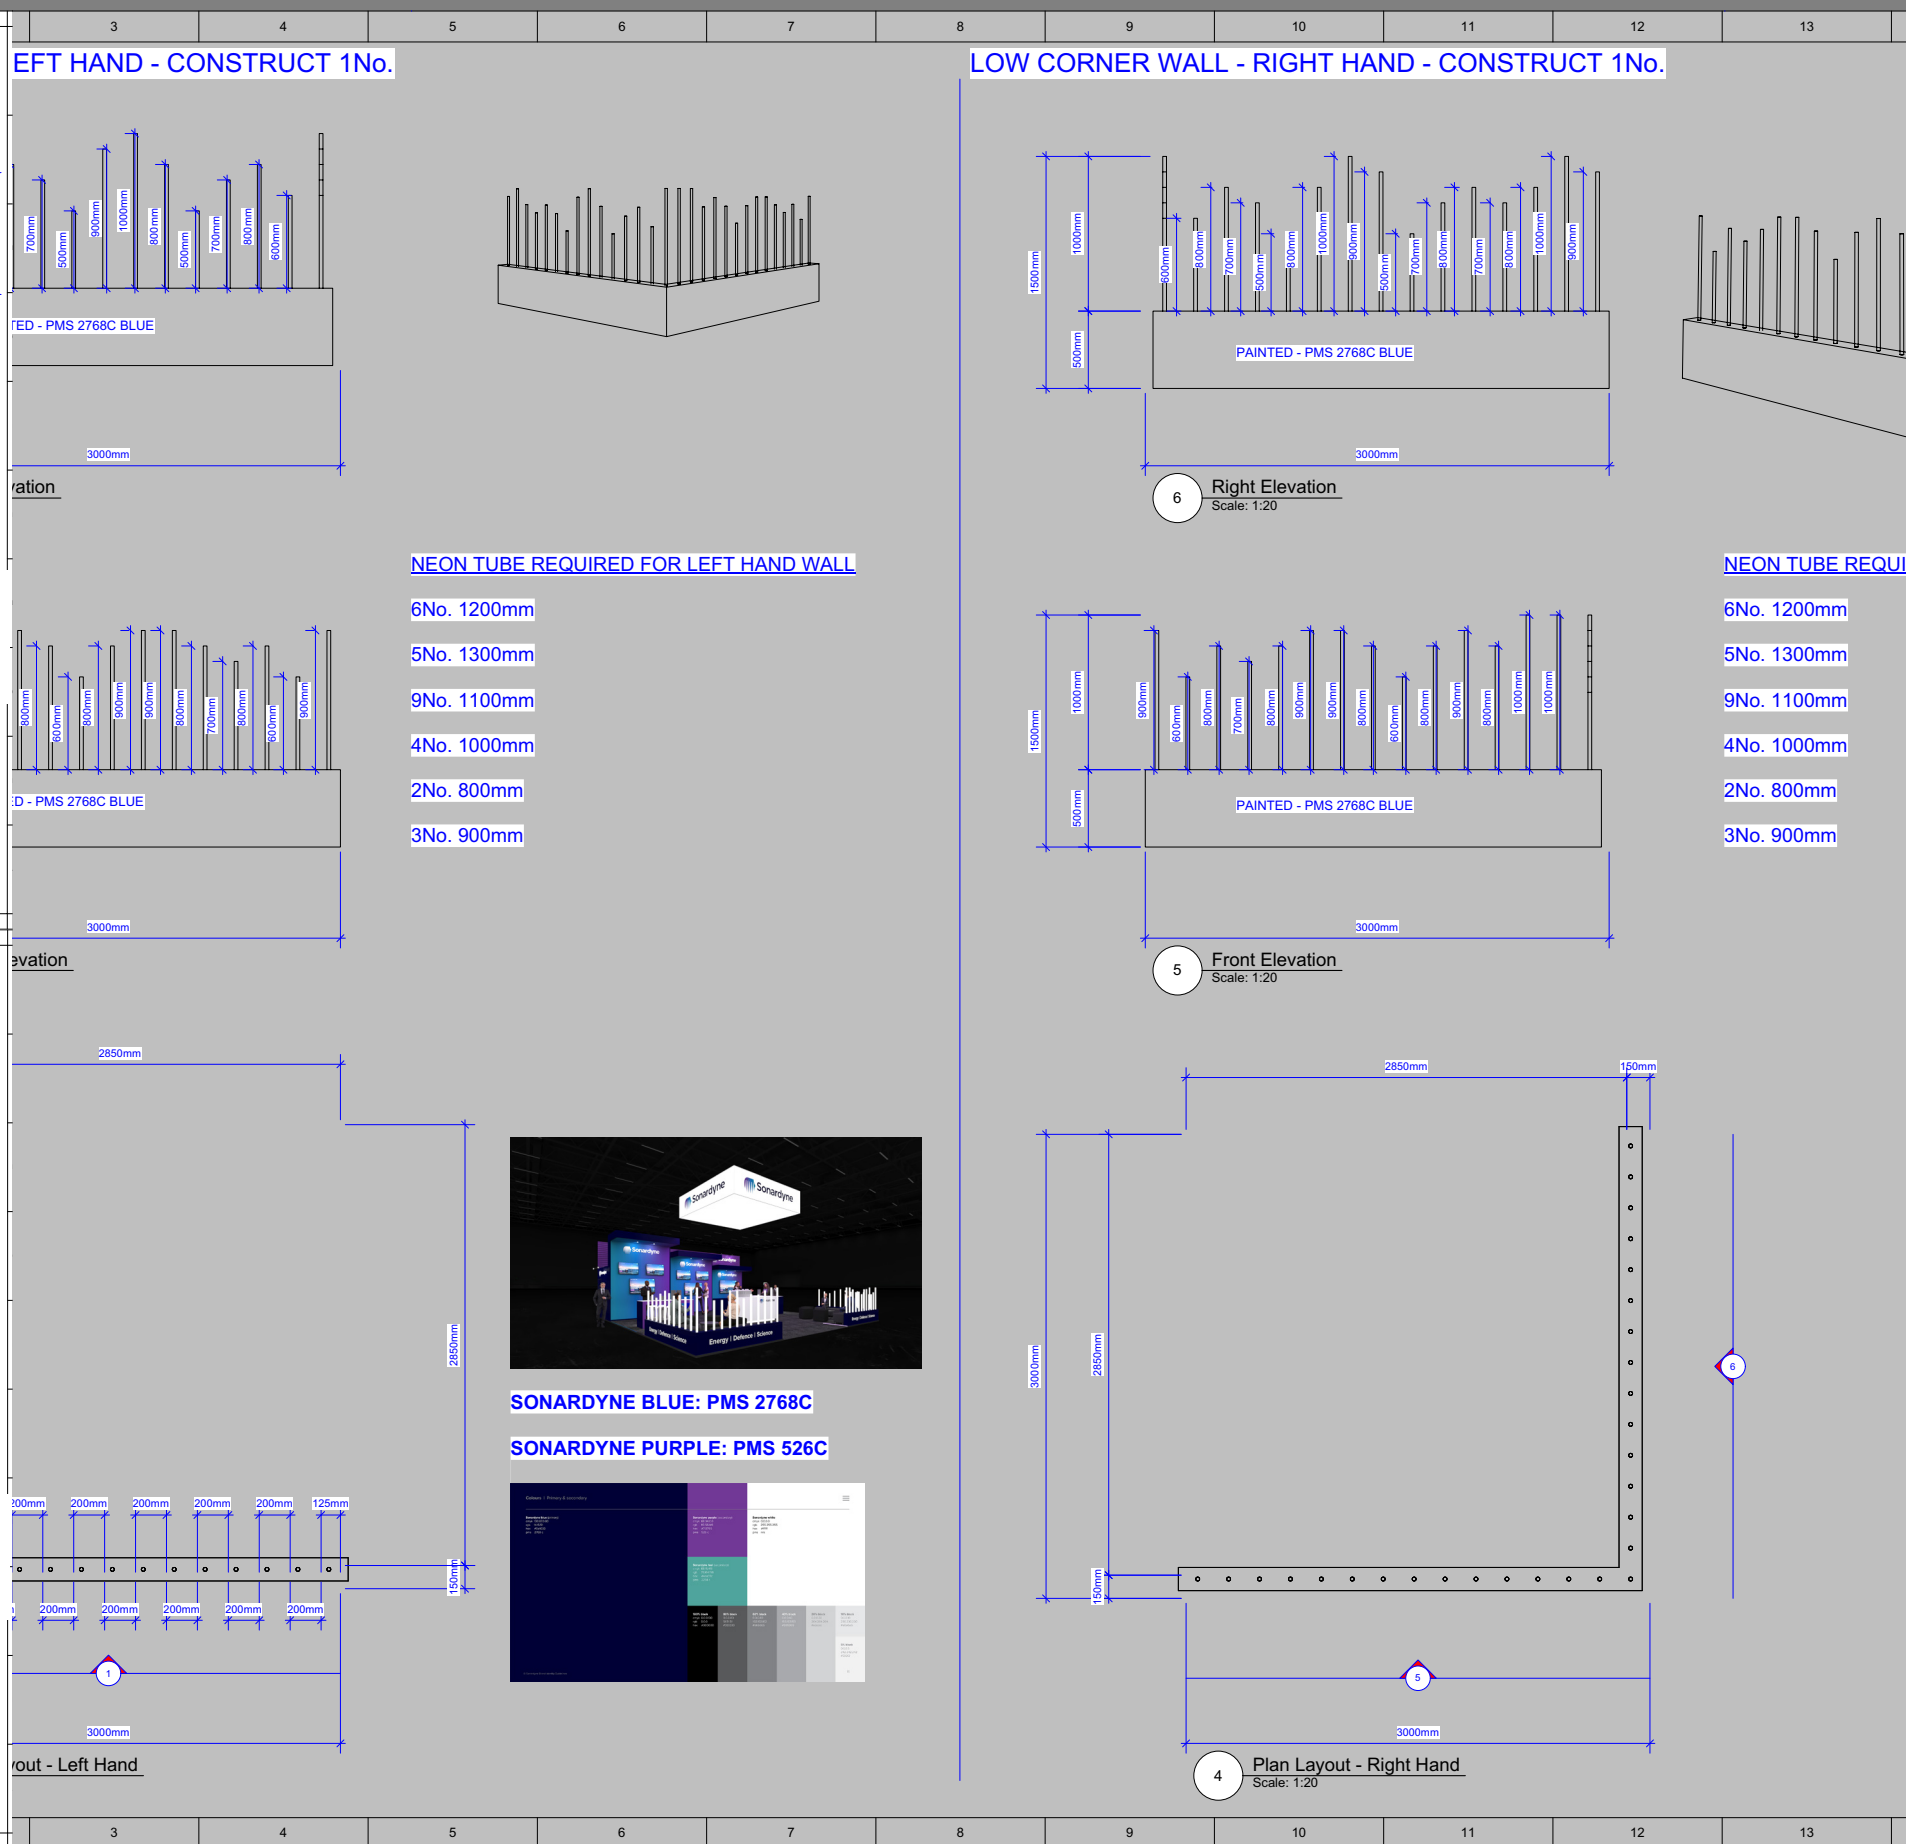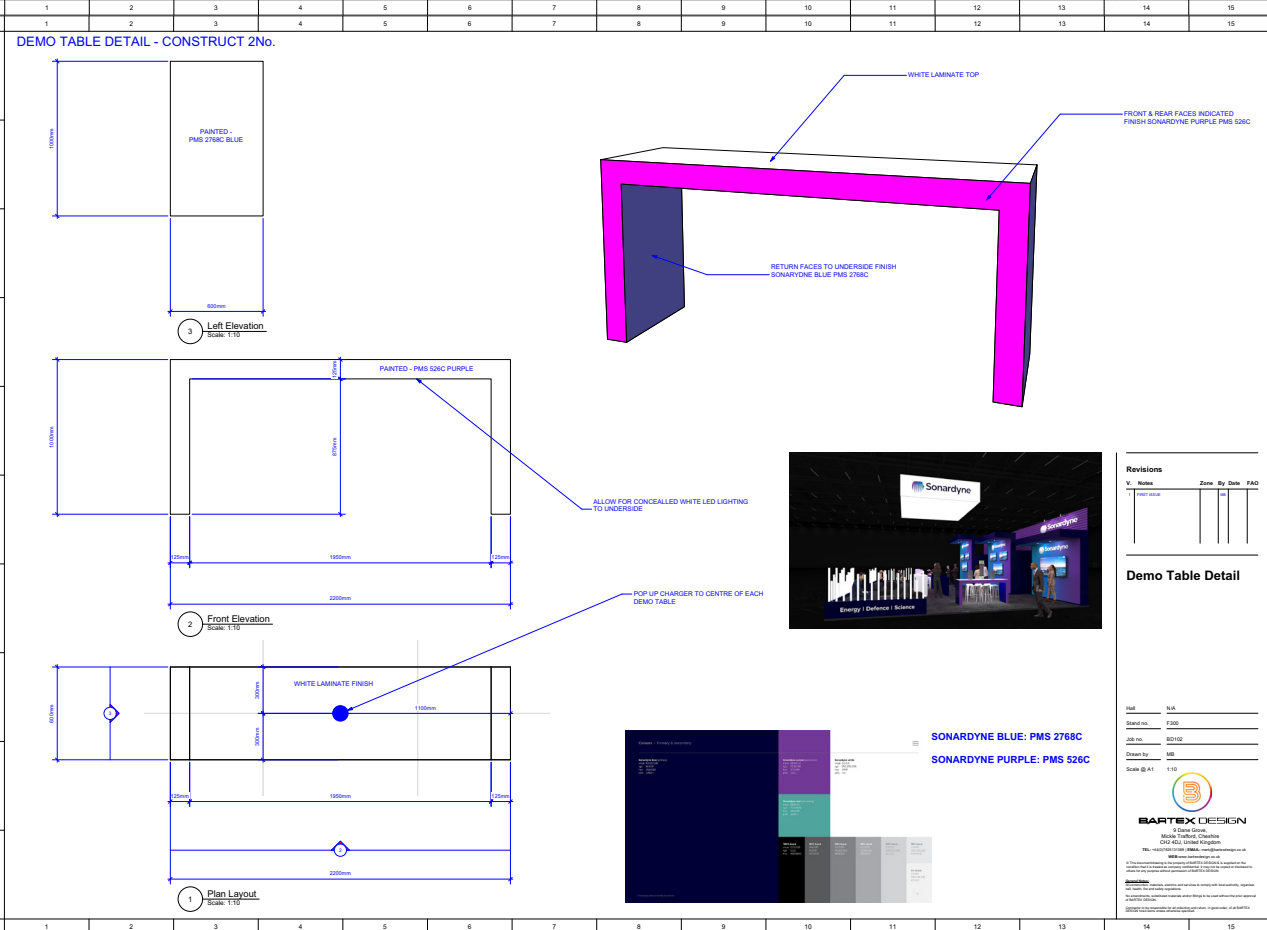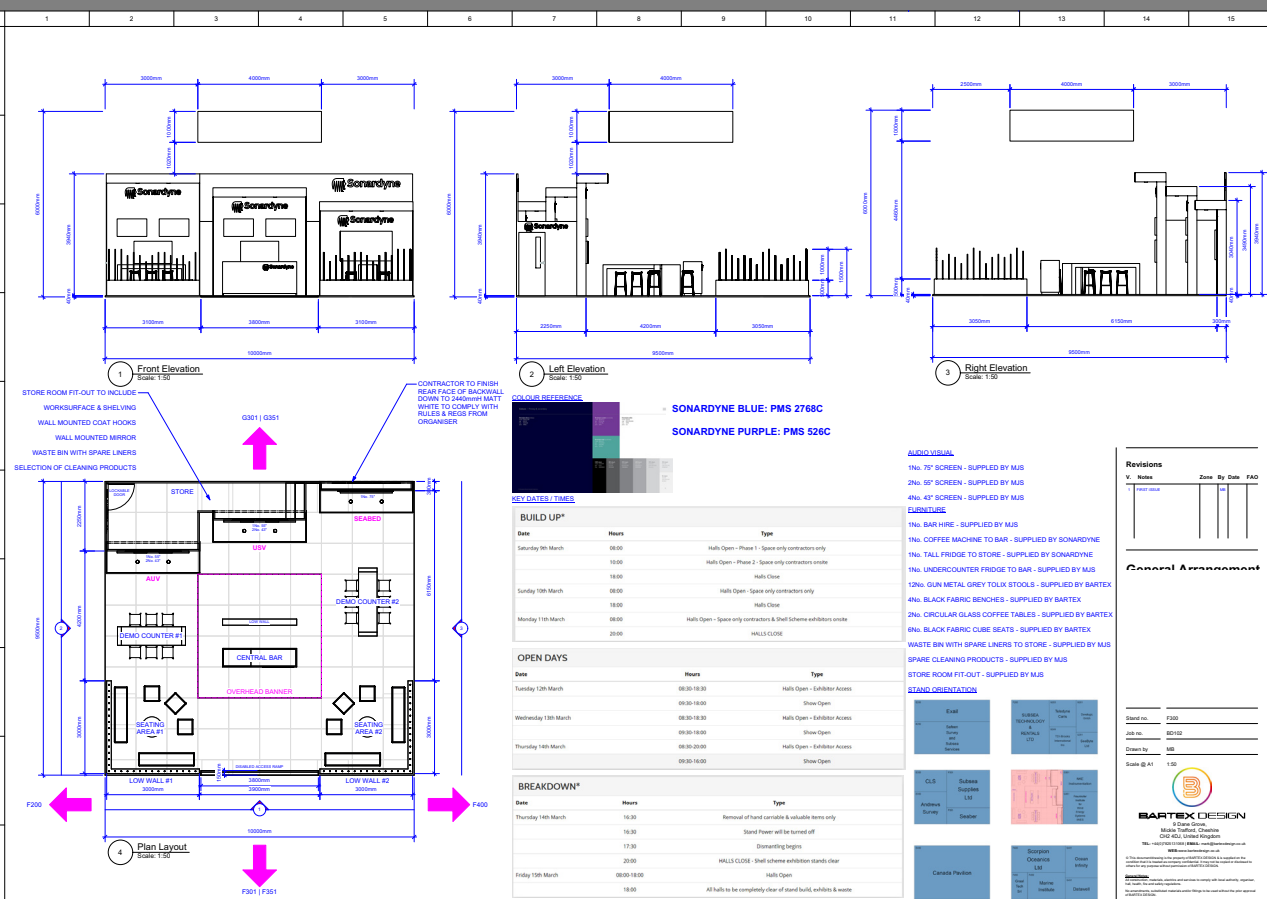



3D TECHNICALS DRAWINGS IN VECTORWORKS & IMPORTED INTO TWINMOTION

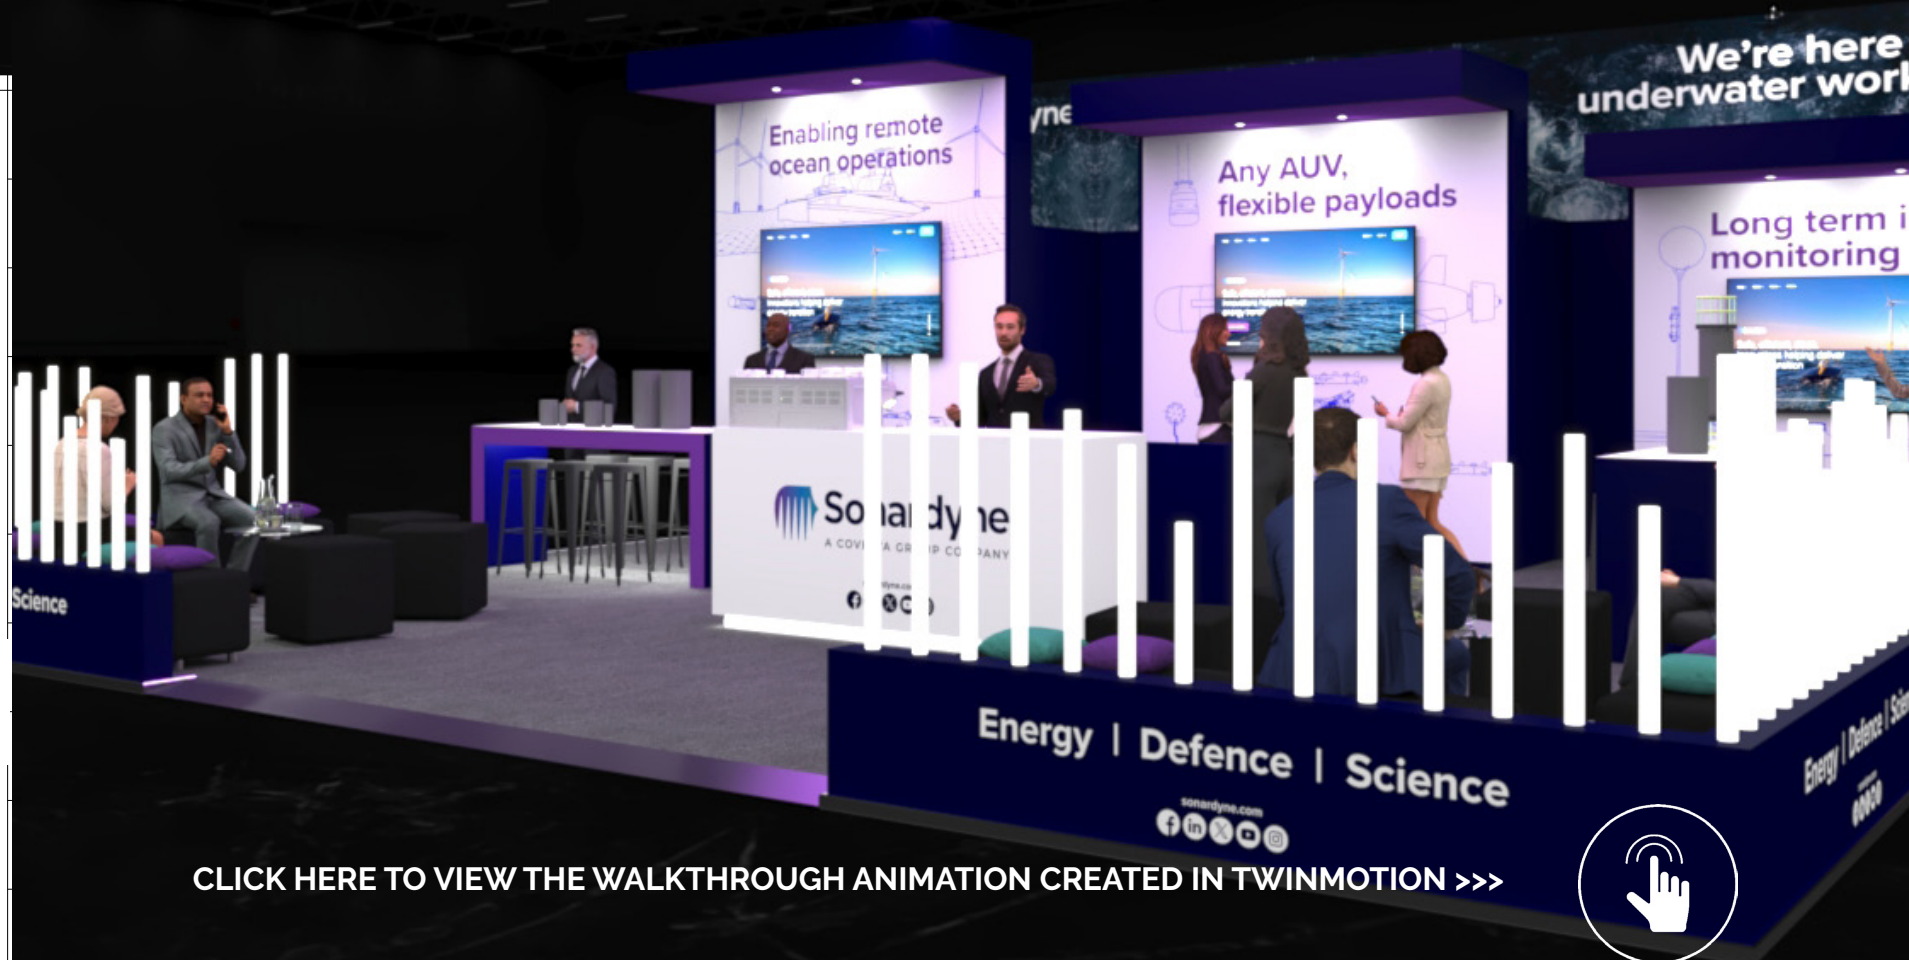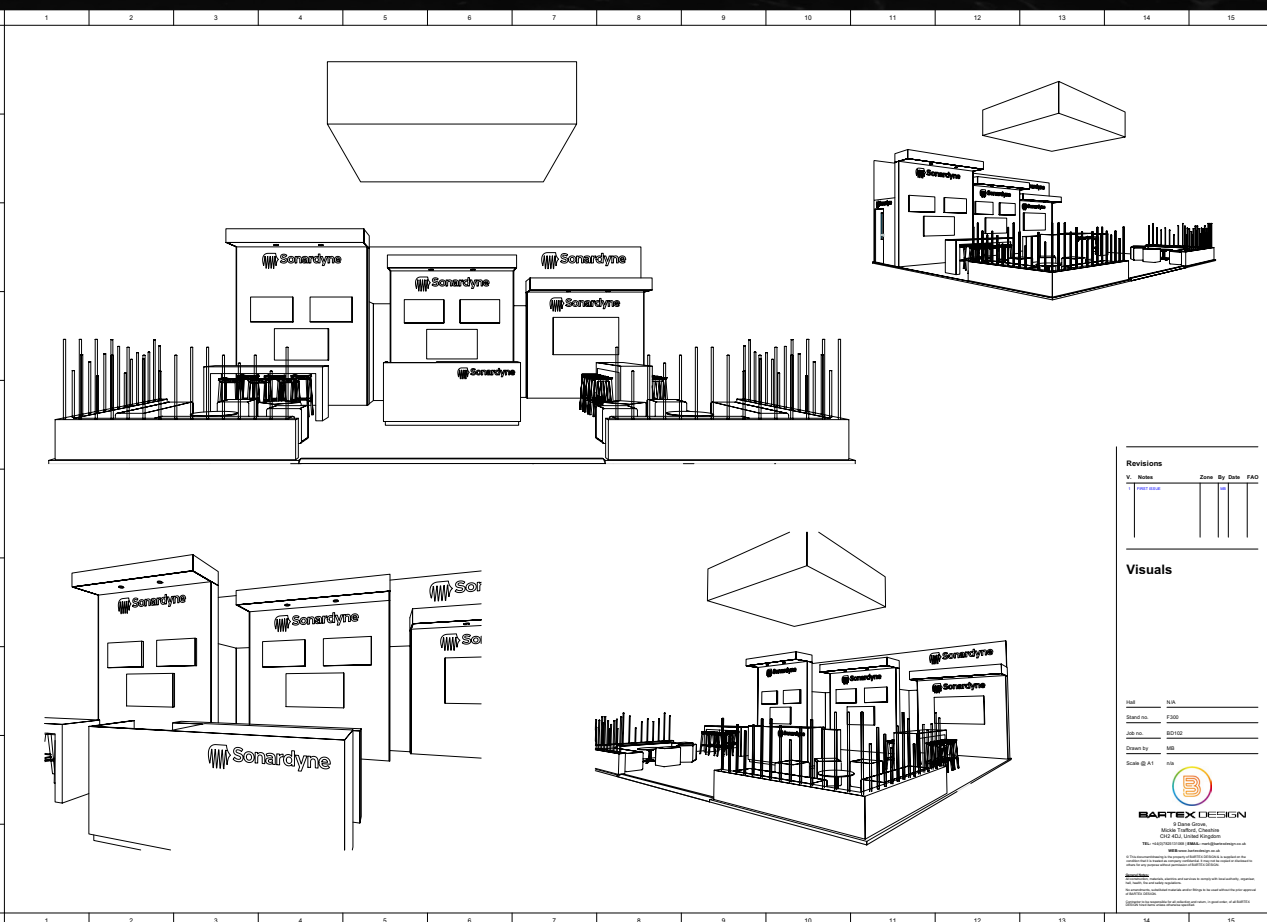

[CLICK HERE TO VIEW THE WALKTHROUGH ANIMATION CREATED IN TWINMOTION >>>](#)



CONTACT

9 DANE GROVE, MICKLE TRAFFORD, CHESHIRE, CH2 4DJ

mark@bartexdesign.co.uk | Tel: 07825131068 | www.bartexdesign.co.uk